0501 • 3/8"-1/2"

0502 • 3/8"-3/4"

AUTOMATIC AIR VENTS "VALMAT" WITH O-RING YELLOW AND NICKEL-PLATED

CONNECTIONS: MALE WITH O-RING

MALE WITHOUT O-RING



HYDRAULIC FEATURES

The automatic air vent "Valmat "has a single automatic float and carries out two main functions: the evacuation of a consistent air flow through a pipeline (e.g., during loading/pressurization of the plant) and degassing, which discharges air trapped or formed in the pipeline, while functioning. This valve has a paramount importance in climatisation networks and systems, evacuating and discharging trapped air in water pipes for services under pressure. Moreover, as thoroughly documented in European Standard EN 14868, the presence of oxygen in heating systems can provoke anodic corrosion, noise, air pockets, obstructions, etc., that may significantly compromise the performance and integrity of the systems. Further, its reduced space requirements make this valve ideal for use inside modern heat generators, where air must be evacuated from the circulation pumps in order to prevent unwanted cavitation phenomena.

TECHNICAL FEATURES

Maximum allowable working pressure (PN) 10 bar

0.2 bar (Grade A according to EN 12266-1) from 0.5 bar to 7 bar (tolerance \pm 10% max. detected) minimum sealing pressure range of operation air evacuation

Temperature:

maximum working temperature (TS) 0°C (excluding ice) +110°C

Compatible fluids

Heat transfer fluids in compliance with Italian national standards (UNI 8065 § 6)

Glycolate solutions (glycol)

Threading: Pipeline connection

Threads according to ISO 228/1

Requirements and tests as per EN 1074-4 (together with additional requisites under FL.GQ.11)

Die cast brass body EN 1982-CB754S Brass plug EN 12165 - CW617N Seat in brass EN 12164 - CW614N Internal mechanisms in ACETAL RESIN (POM) Seat gaskets and o-ring in NBR RUBBER Float in highly resistant POLYPROPILENE PP STAINLESS STEEL spring EN 10088-14310 (AISI 302) Nickel plating ELECTRODEPOSITED COATING EN 12540 (Cu/Ni5s)

PRODUCT CODES

0501.012 male 3/8" with o-ring yellow 0501.015 male 1/2" with o-ring yellow 0501.112 male 3/8" with o-ring nickel plated 0501.115 male 1/2" with o-ring nickel plated yellow nickel plated yellow nickel plated yellow




OFFICINE RIGAMONTI S.p.A. via Circonvallazione, 9 13018 Valduggia (VC), ITALY TEL. +39 0163.48165 FAX +39 0163.47254 www.officinerigamonti.it export@officinerigamonti.it

0501 • 3/8"-1/2"

0502 • 3/8"-3/4"

AUTOMATIC AIR VENTS "VALMAT" WITH O-RING YELLOW AND NICKEL-PLATED

CONNECTIONS: MALE WITH O-RING MALE WITHOUT O-RING

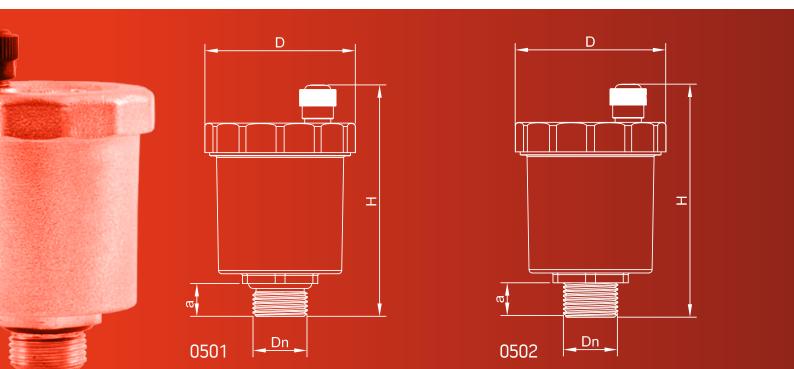

FEATURES

Cod.	Dimensions			
	Dn	D	Н	а
0501	3/8"	Ø46	70	7,5
0501	1/2"	Ø46	70	8
0502	3/8"	Ø46	70	9
0502	1/2"	Ø46	70	9
0502	3/4"	Ø46	70	8,5

OPERATIONAL CURVE AIR VENTS

